




Fitting Instructions for OCG0030BK Oil Cooler Guard
SUZUKI GSX-R1000 '17-



In This Kit There Should Be
1x Oil Cooler Guard (OCG0030BK)
2x 100mm Lengths of self-adhesive Foam

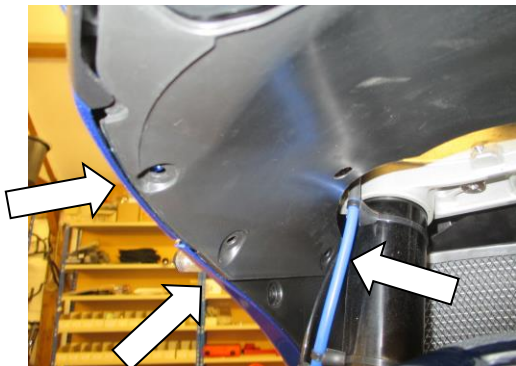

Picture 1




Picture 2



Picture 3



Picture 4

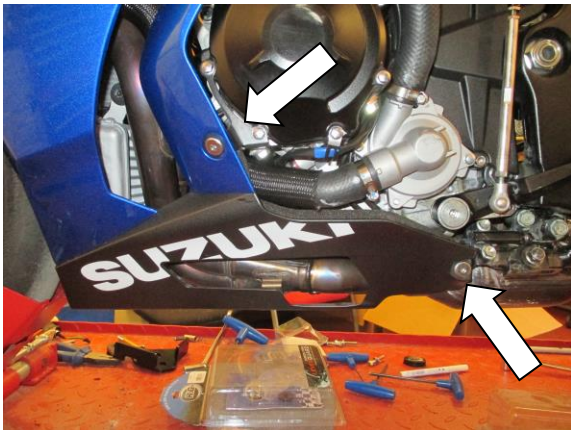

Picture 5



Picture 6



Picture 7



Picture 8




Picture 9



Picture 10



Picture 11

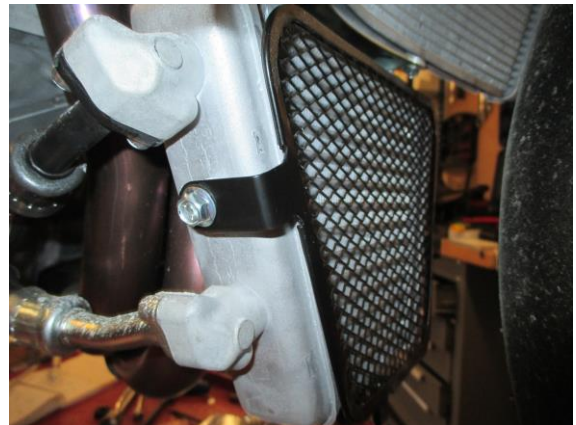

Picture 12



Picture 13



Picture 14



GENERAL TORQUE SETTINGS

M4 BOLT = 8Nm
M5 BOLT = 12Nm
M6 BOLT = 15Nm
M8 BOLT = 20Nm
M10 BOLT = 40Nm
M12 NYLOC NUT = 40Nm

TOOLS REQUIRED

- 4 & 5mm Allen key or socket bits with extension.
- 10mm socket or spanner.

FITTING INSTRUCTIONS

- To fit the oil cooler guard, the fairings must first be removed from the motorcycle.
- Remove the under-nose plastic cowling, by removing the six push rivets arrowed in pictures 1 & 2 and the remaining two push rivets in the centre, as shown in picture 3.
- To remove the left side fairing, remove the four bolts that are arrowed in pictures 4 & 5 and the push rivet that mounts the radiator cowling that is shown in picture 6.
- The left side fairing can now be removed from the bike. Start by pulling the rear off its rubber mount, as shown in picture 7, before removing the top edge from its rubber mount and plastic locating tabs, as shown in picture 8. With the top edge released, disconnect the wiring connector for the indicator, as shown in picture 9 then unclip the mounts along the front bottom edge that mount the bellypan to the radiator surround. The fairing should then be free to be removed from the bike.
- Repeat the above two steps to remove the fairing from the right side of the bike. *The push rivet that secures the radiator surround on the right side can be left in place as this can remain fixed to the fairing.*
- With the fairings off, access can be gained to the oil cooler. Remove the three bolts that mount the OEM oil cooler guard in place, as shown in pictures 10, 11 & 12.
- To fit the oil cooler guard to the bike cut the foam strip provided into 10mm wide pieces and stick them to the back of the oil cooler guard frame, so that they sit between the oil cooler guard and the oil cooler.
- Offer the R&G Oil Cooler Guard into place and re-fit the three OEM bolts to secure in place, one on the bottom as shown in picture 13 and one on either side.
- Ensure the oil cooler guard is correctly fitted before tightening all three bolts to hold the oil cooler guard securely in place.
- Re-fit the fairings to both sides of the bike, ensuring to re-connect the indicator wiring. The radiator surround should fit neatly around the oil cooler guard as shown in picture 14.
- Re-fit the under-nose cowling and push rivets.
- Ensure everything is correctly re-fitted and the oil cooler guard is securely mounted before riding.

ISSUE 1 05/05/2016 (AR)

Digital copies of these instructions are available to download from www.rg-racing.com

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



NOTICE DE MONTAGE POUR OCG0030BK
PROTECTION REFROIDISSEUR D'HUILE
SUZUKI GSX-R1000 '17-



Le kit doit contenir :

- 1x Protection refroidisseur d'huile (OCG0030BK)**
- 2x 100mm Longueurs de mousse autocollante**

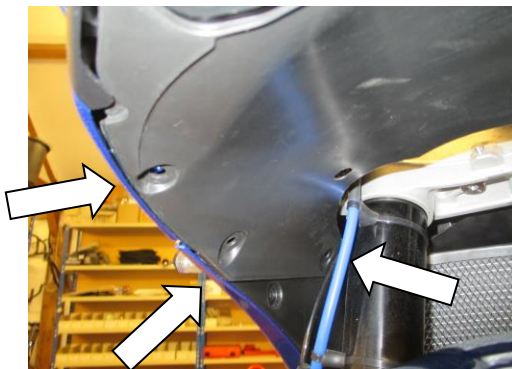


Photo 1



Photo 2



Photo 3



Photo 4

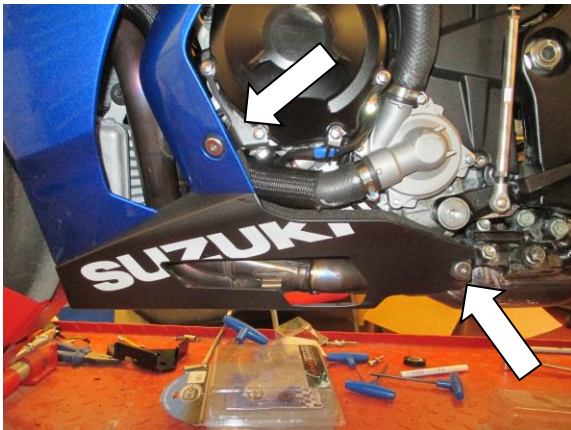


Photo 5



Photo 6



Photo 7



Photo 8



Photo 9



Photo 10



Photo 11

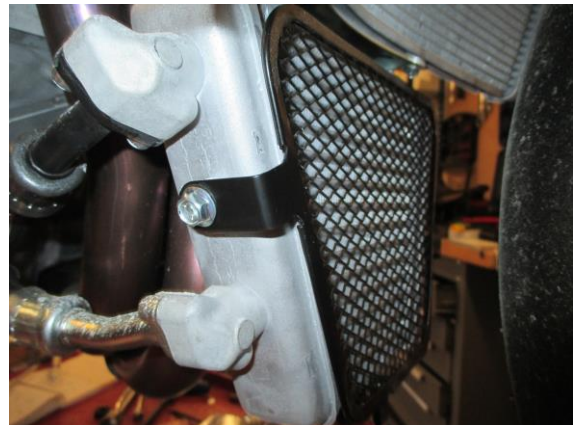


Photo 12



Photo 13



Photo 14



COUPLES DE SERRAGE RECOMMANDÉS

M4 BOULON = 8Nm
M5 BOULON = 12Nm
M6 BOULON = 15Nm
M8 BOULON = 20Nm
M10 BOULON = 40Nm
M12 ECROU = 40Nm

OUTILS REQUIS

- Clé Allen 4 & 5mm avec extension.
 - Clé 10mm.

NOTICE DE MONTAGE

- Pour monter la protection, refroidisseur d'huile, les carénages doivent d'abord être enlevés de la moto.
- Enlever le capot en plastique du sous-nez, en enlevant les 6 rivets indiqués sur les photos 1 & 2 et les 2 rivets restants au centre, voir photo 3.
- Pour enlever le carénage du côté gauche, enlever les 4 boulons indiqués sur les photos 4 & 5 et le rivet qui fixe le capot de radiateur indiqué sur la photo 6.
- Le carénage du côté gauche peut maintenant être enlevé de la moto. Commencer par tirer l'arrière du support en caoutchouc, voir photo 7, avant d'enlever le bord supérieur de son support de fixation et des onglets plastique, voir photo 8. Une fois le bord supérieur libéré, déconnecter le connecteur de fil de clignotant, voir photo 9. Ensuite, déclipser les supports le long du bord avant inférieur qui fixent le contour de radiateur. Le carénage doit maintenant pouvoir être enlevé de la moto.
- Répéter les 2 précédentes étapes pour enlever le carénage du côté droit de la moto. *Le rivet qui fixe le contour de radiateur du côté droit peut rester en place.*
- Une fois les carénages enlevés, l'accès au radiateur est possible. Desserrer les 3 boulons qui fixent la protection de refroidisseur d'huile d'origine en place, voir photos 10, 11 & 12.
- Pour monter la protection refroidisseur d'huile sur la moto, Couper le bandeau de mousse fourni en pièces de 10mm et collez les au bas du cadre de protection refroidisseur d'huile, pour qu'elles se placent entre la protection refroidisseur d'huile et le refroidisseur d'huile.
- Monter la protection refroidisseur d'huile R&G en place et réinsérer les 3 boulons d'origine pour fixer la position, un au bas comme indiqué sur la photo 13 et un de chaque côté.
- Veiller à ce que la protection refroidisseur d'huile soit correctement montée avant de serrer les 3 boulons qui servent à tenir la protection refroidisseur d'huile en place.
- Remonter les carénages des 2 côtés, sans oublier de reconnectant le fil de clignotant. Le contour de radiateur doit se placer autour de la protection refroidisseur d'huile, voir photo 14.
- Remonter le capot au sous-nez et les rivets.
- Vérifier à ce que tout soit correctement remonté et que la protection refroidisseur d'huile soit correctement fixée avant de prendre la route.

ISSUE 1 05/05/2016 (AR)

Notice disponible au téléchargement sur www.rg-racing.com

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com