




FITTING INSTRUCTIONS FOR ECC0229R LHS CRANKCASE COVER
SUZUKI GSX-R1000 '17-

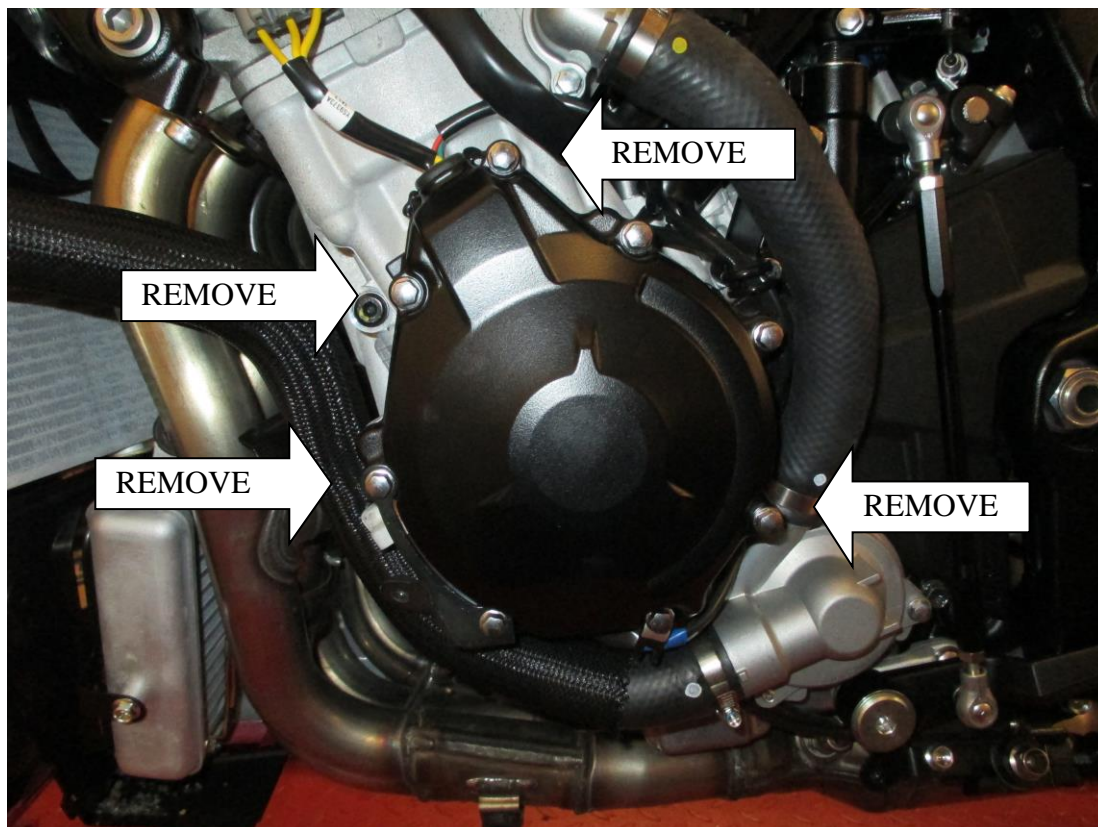

In this kit there should be:

- 1x Engine Case Cover (ECC0229R)
- 1x M6 x 55mm Long Cap Head Bolt
- 3x M6 x 40mm Long Cap Head Bolts
- 1x Racing Puck (SK0001SK (already fitted)).
- 2x PAL Nuts (already fitted).

PLEASE READ THESE INSTRUCTIONS FULLY BEFORE STARTING

- Please make sure the engine is cold before proceeding with the fitting of the R&G cover.
- Remove the left side fairing from the bike by removing the plastic cover underneath the front fairing (in front of the forks) by releasing the push rivets and then remove the four fairing bolts which attach the fairing in place, before disconnecting the indicator connector and removing the fairing from the bike.
- To fit the R&G engine case cover remove the four M6 engine case bolts in the positions arrowed above. Hold the cover loosely over the case to help identify the correct ones. **DO NOT REMOVE ALL OF THE CASE BOLTS.**
- Offer up the R&G cover to the engine and carefully fit it over the casing. Ensure that the three R&G bolts are lined up with the holes in the engine casing, and then push on as far as it will go.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Fit the bolts through the Engine Case Cover and into the engine case, ensuring the longer of the four bolts is fitted in position marked “A”.
- With a 5mm Allen key tighten the bolts equally so that they pull the cover into place. **DO NOT FULLY TIGHTEN.**
- Finally use a torque wrench set at 10 N/m (7 Lb/ft) to fully tighten.
- Re-position the side fairing and re-fit all bolts as removed.
- It is suggested that you check the tightness of the mounting bolts on a regular basis i.e. when cleaning or once a month.
- **NOTE** for the cleaning of this product you should only use a soft polishing cloth and a mild general cleaning agent.
- **AVOID HARMFUL CHEMICALS. IF IN DOUBT DO NOT USE AS THEY COULD ALTER THE STRENGTH OF THE COVER.**
- R&G will accept no liability if the above procedure and torque settings are not followed.

ISSUE 2 11/12/2017 (AR)

ISSUE 3 30/06/2020 NEW SPACER UPDATE

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.


R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



**NOTICE DE MONTAGE POUR ECC0229R PROTECTION CARTER MOTEUR COTE GAUCHE
SUZUKI GSX-R1000 '17-**

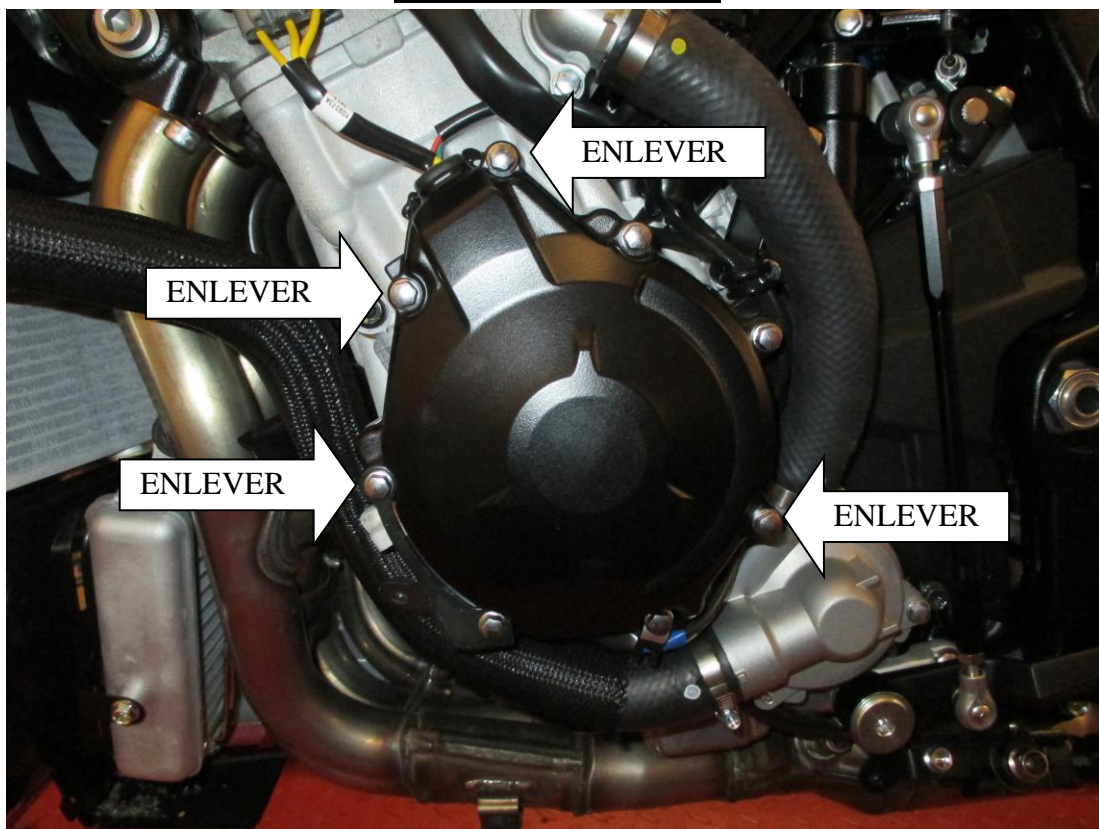

Le kit doit contenir :

- 1x Protection carter moteur (ECC0229R)
- 1x M6 x 55mm Boulon
- 3x M6 x 40mm Boulons
- 1x Palet de course (SK0001SK (déjà monté)).
- 2x Ecrous PAL (déjà monté).

Bien lire ces instructions avant de procéder au montage :

- Assurez-vous que le moteur soit froid.
- Enlever le carénage du coté gauche de la moto en enlevant le cache plastique au dessous du carénage avant (A l'avant de la fourche) en libérant les rivets puis enlever les 4 boulons de carénage qui fixent le carénage en place, avant de déconnecter le connecteur de clignotant et d'enlever le carénage de la moto.
- Pour monter la protection carter moteur R&G, enlever les 4 boulons M6 du carter moteur dans les positions indiquées ci-dessus. Tenir le couvercle autour du carter pour aider à les identifier. **NE PAS ENLEVER TOUS LES BOULONS DE CARTER.**

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Mettre la protection R&G en place en faisant bien attention. S'assurer que les 4 boulons R&G soient alignés avec les trous, puis, une fois cela vérifié, pousser la protection jusqu'à la limite.
- Insérer les boulons dans la protection carter moteur puis dans le carter moteur, en veillant à ce que le plus long des 3 boulons soit monté comme sur la position marquée "A".
- Serrer les boulons avec une clé Allen de 5mm, pour qu'ils placent la protection en place. NE PAS SERRER COMPLETEMENT.
- Utiliser une clé dynamométrique à 10 Nm (7 Lb ft) pour bloquer).
- Repositionner le carénage et réinsérer les boulons de la même façon qu'ils ont été enlevés.
- Nous vous suggérons de vérifier le serrage au moins une fois par mois, lors du nettoyage par exemple.
- NOTE: Pour le nettoyage, vous devriez utiliser uniquement un chiffon doux et un agent nettoyant doux.
- Ne pas utiliser d'agents chimiques qui pourraient altérer l'efficacité de la protection.
- R&G n'acceptera aucune responsabilité en cas de mauvais couple de serrage ou d'utilisation inappropriée d'agents nocifs.

ISSUE 2 11/12/2017 (AR)
ISSUE 3 30/06/2020 NEW SPACER UPDATE